



HiBoost 10K Plus Pro Consumer Booster Series

Product Overview

The HiBoost Plus Pro Signal Booster kit is a powerful cell phone signal booster that can cover dead zones, eliminate dropped calls and improve your overall data and coverage quality. Featuring a built-in antenna and an secondary indoor antenna port, users can expand their signal coverage zone with two different antennas. Included in this kit is a secondary indoor antenna that allows users to customize their indoor signal distribution points. Now featuring the Signal Supervisor Application that allows users to remotely optimize and monitor the current booster status.

Key Features:


- Covers up to 10,000 square feet
- Powerful booster with a (+) 72 decibel max gain
- Built-in internal antenna with an additional antenna port
- LCD Display Screen + LED Status Indicators for easy monitoring/troubleshooting
- Easier to install and monitor remotely using the Signal Supervisor Application
- Compatible with all major US and Canada cell phone carriers
- This product is FCC and IC Certified



Built-in Internal Antenna

**Signal Supervisor Application
Bluetooth & WiFi Compatible**

How it Works

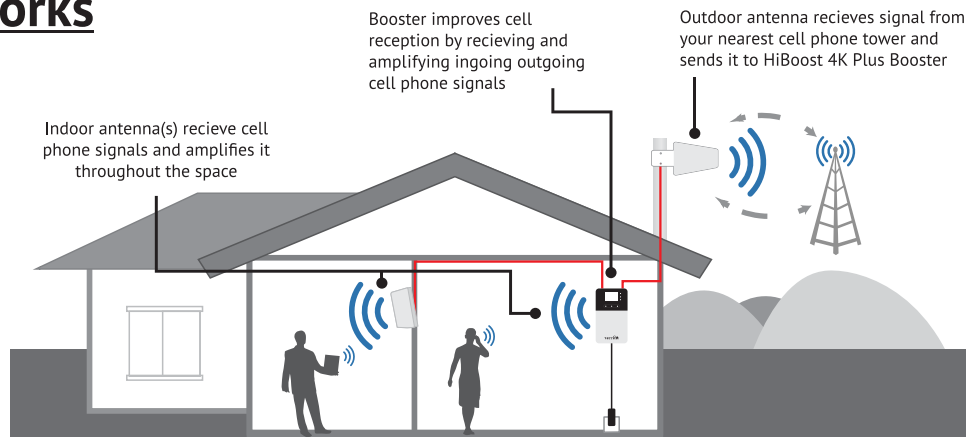

Please contact our customer support for more information.

Email: info@hiboostusa.com

Phone: (972) 870-5666

www.hiboost.com





Technical Specifications

HiBoost 10K Plus Pro

Model: F15Gi-5S-Pro

Working Bands	698-716 / 776-787 / 824-849 / 1850-1915 / 1710-1755
UL Frequency Range	728-746 / 746-757 / 869-894 / 1930-1995 / 2110-2155
DL Frequency Range	Band 12 / Band 13 / Band 5 / Band 25-2 / Band 4
Supported Standards	CMDA, WCDMA, GSM, EDGE, HSPA+, EVDO, LTE and all other cellular standards
Maximum Gain	72 dB
Maximum Output Power	DL 12 dBm
MGC (Step Attenuation)	≥ 25 dB / 1 dB step
I/O Port	N-Female
Impedance	50 ohm
Environment Condition	IP40
Dimensions	6 in x 9.7 in x 1.4 in / 152 mm x 246 mm x 36 mm
Weight	≤ 5.0 lb / 2 kg
Power Supply	Input AC 100~240 V, 50/60 Hz, Output DC 12 V/3 A

This is a **CONSUMER** device.

BEFORE USE, you **MUST REGISTER THIS DEVICE** with your wireless provider and have your provider's consent. Most wireless providers consent to the use of signal boosters. Some providers may not consent to the use of this device on their network. If you are unsure, contact your provider.

In Canada, BEFORE USE, you must meet all requirements set out in ISED CPC-2-1-05.

You **MUST** operate this device with approved antennas and cables as specified by the manufacturer. Antennas **MUST** be installed least 20 cm (8 inches) from (i.e., **MUST NOT be installed within 20 cm of**) any person.

You **MUST** cease operating this device immediately if requested by the FCC (or ISED in Canada) or a licensed wireless service provider.

WARNING. E911 location information may not be provided or may be inaccurate for calls served by using this device.

This device may be operated **ONLY** in a fixed location (i.e., may operate in a fixed location only) for in-building use.