



Home&Office Series

HiBoost Hi13-EGSM

## Description

HiBoost Home&Office wide band booster Hi13-EGSM is designed to improve mobile signal for end users directly. It covers any indoor area up to 1000 square meters and is guaranteed to supply clear calls without drops and interruptions.



## Key Features

- Supports EGSM 900 MHz
- Real time LCD display
- Manual and automatic gain control functions
- Self-oscillation protection
- High integration
- Compact and light
- Good heat dissipation for long time operation
- Wide power supply range and low power consumption



## Booster Kit Includes

- EGSM mobile signal booster
- Outdoor wide band panel antenna with 50 ft/15.2m HiBoost200 cable
- Indoor whip antenna
- 5V/3A, AC/DC power supply



Address: Herderstraße 94, 40721 Hilden, Germany Phone: +44 (20) 3239-5808 E-mail: sales@huaptec.eu Website: www.hiboost.eu




Designed and Produced By Huaptec




## Installation Examples

Standard Kit (coverage up to 500 sq.m)

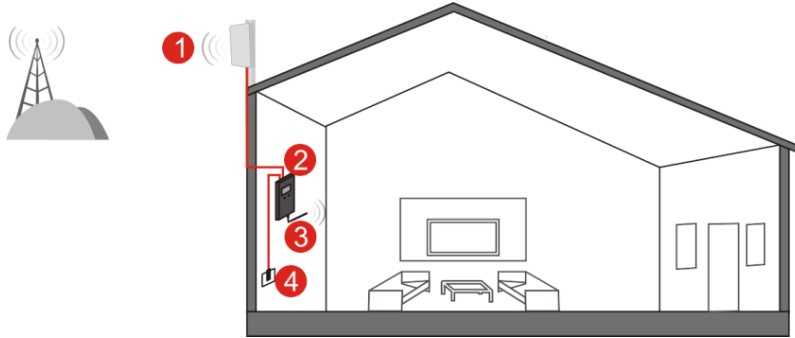

1. Outdoor panel antenna    2.Booster    3.Indoor whip antenna    4.Power supply

Standard Kit + 1 optional Panel or Omni Kit (+1 indoor panel/omni antenna - coverage up to 1000 sq.m.)

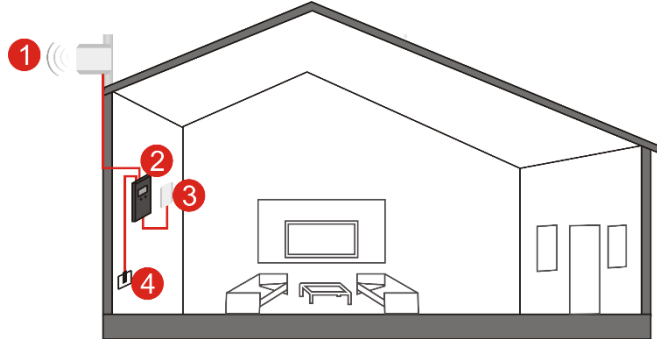

1. Outdoor panel antenna    2.Booster    3.Indoor panel antenna    4.Power Supply



## Specification

RF Parameter		Uplink	Downlink
Frequency Range	900MHz	880~915MHz	925~960MHz
Max .Gain		60dB	65dB
MGC ( Step Attenuation )		≥31dB / 1dB step	
Intelligent AGC*	ALC	≥42dB	
	ISO	≥42dB	
Gain Flatness		Typical≤5dB (p-p)	
Noise Figure @ Max. System Gain		Typical≤5dB	
V.S.W.R		Typical≤2	
Group Delay		≤1μs	
Frequency Stability		≤0.01ppm	
<b>Electrical Parameter</b>			
Power Supply		Input AC90~240V,50/60Hz,Output DC5V/3A	
Power Consumption		≤5W	
Input & Output Impedance		50 ohm	
<b>Indicator</b>			
LCD Display		Frequency, Gain, Output Power, ALC, ISO, etc.	
<b>Mechanical Parameter</b>			
I/O Port Type		N-Female	
Dimension		4.7*6.1*1.3 inch/120*155*34mm	
Weight		≤1.5 lbs/0.7KG	
<b>Environment Parameter</b>			
Operating Temperature		-10°C~+55°C	
Storage Temperature		-10°C~+80°C	
Relative Humidity		5% - 95%	
Barometric Pressure		55 kPa -106 kPa	
Environment Conditions		IP40	

\* MGC, ALC and ISO share intelligent AGC 42 dB range.

\*\* ALC: 42dB automatic gain adjustment range to stabilize the output power.

\*\*\* ISO: 42dB intelligent isolation processing to avoid self-oscillation.

Note: Typical specification for room temperature.

We reserve the right to change this specification without prior notice.