




## QUICK START GUIDE C27G-5S-RV

### Package Contents




Signal Booster  
X1



Indoor Antenna  
X1




Outdoor Antenna  
X1




Power Supply  
X1


### Overview

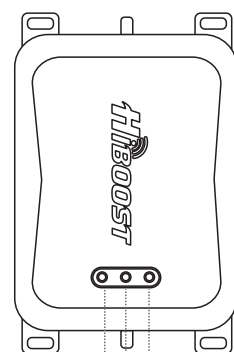

Bluetooth  
Data  
Alarm




Power connector  
Connect Outdoor antenna  
Only for factory debugging purpose




Connect Indoor antenna

### How It Works

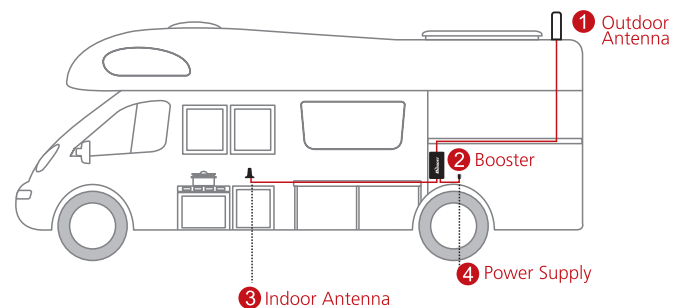


### Getting Started



#### Step 1


Mount the outdoor Omni-directional antenna to the roof of the vehicle using the provided mounting equipment.

**Tips:** Near the center of the roof, At least 12 inches away from any other antenna, Keep the maximum distance from the window (including sunroofs).

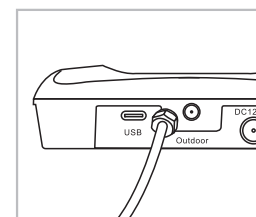


#### Step 2

Connect the cable from the Outdoor Antenna to the port labeled Outdoor on the booster.

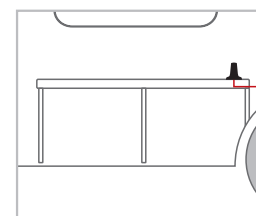


#### Step 3

Mount or place the indoor antenna to the desired location.

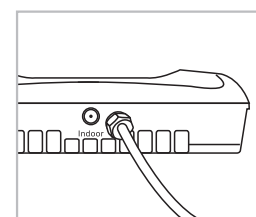

#### Step 4

Connect the cable from the indoor antenna to the port Indoor on the booster

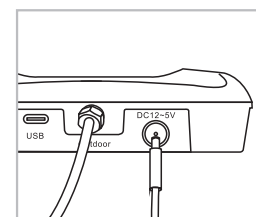

#### Step 5

Connect the power supply cord to the end of the booster.

**Tips:** If you encounter issues with installation please see the "Troubleshooting" section of the User Manual



## QUICK START GUIDE C27G-5S-BTW


### Package Contents



Signal Booster  
X1



Indoor Antenna  
X1





Outdoor Antenna  
X1



Power Supply  
X1

### Overview

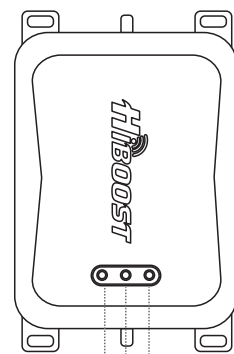


Power connector  
Connect Outdoor antenna  
Only for factory debugging purpose




Connect Indoor antenna

### How It Works

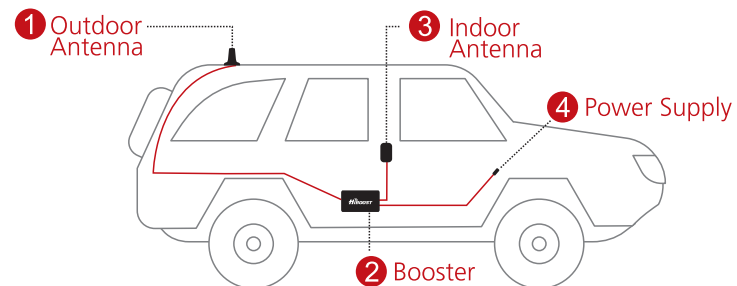


### Getting Started



#### Step 1


Clean the surface where you will place the outdoor antenna, mount the outdoor antenna by placing on top of vehicle.

**Tips:** Near the center of the roof, At least 12 inches away from any other antenna, Keep the maximum distance from the window (including sunroofs).

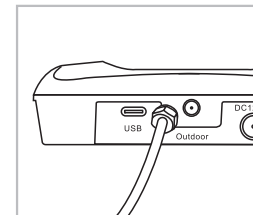

#### Step 2


Connect the cable from the Outdoor Antenna to the port labeled Outdoor on the booster.

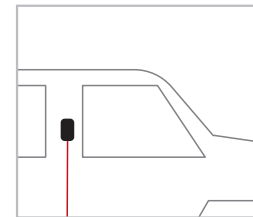

#### Step 3


Mount indoor antenna on the side of the seat or on the dashboard. Use the velcro adhesive strip attach to the flat side of the antenna, Then mount to desired location.

**Tips:** DO NOT MOUNT WHERE AIRBAGS WILL DEPLOY!

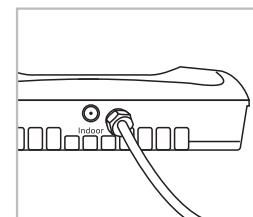

#### Step 4

Connect the cable from the inside antenna to the port Indoor on the booster

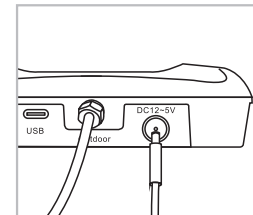

#### Step 5

Connect the power supply cord to the end of the booster.

**Tips:** If you encounter issues with installation please see the "Troubleshooting" section of the User Manual